



**OCTOBER 2010**

**ROAD MAP TRACK 5**  
Concrete Pavement Equipment  
Automation and Advancements

**PRIMARY SOURCE**  
*Improving Concrete Overlay  
Construction (Iowa Highway  
Research Board Project TR-600)*  
June 2010  
James K. Cable, Cable Concrete  
Consultation

**SECONDARY SOURCE**  
*Stringless Portland Cement  
Concrete Paving*  
February 2004  
James K. Cable, Cable Concrete  
Consultation

**SPONSOR**  
Federal Highway Administration  
Iowa Department of  
Transportation  
Iowa Highway Research Board

**MORE INFORMATION**  
Dale Harrington  
515-956-2020  
[dharrington@snyder-associates.com](mailto:dharrington@snyder-associates.com)

Moving Advancements into Practice (MAP) Briefs describe promising technologies that can be used now to enhance concrete paving practices. MAP Brief 8-1 provides information relevant to Track 8 of the CP Road Map, Long-Life Concrete Pavements.

The Long-Term Plan for Concrete Pavement Research and Technology (CP Road Map) is a national research plan developed and jointly implemented by the concrete pavement stakeholder community. Publications and other support services are provided by the Operations Support Group and funded by TPF-5(185).

MAP Brief 8-1 is available at:  
[http://www.cproadmap.org/  
publications/MAPbrief8-1.pdf](http://www.cproadmap.org/publications/MAPbrief8-1.pdf)

## "Moving Advancements into Practice"

### MAP Brief 5-1:

Describing promising technologies that can be used now to enhance concrete paving practices

# Stringless Concrete Paving

## Introduction

Conventional concrete paving with a slipform paver requires the installation of a stringline and support posts adjacent to the roadway to establish the correct pavement alignment and profile. The stringline adds several additional feet (6 ft. +/-) of required clearance to the paving envelope, which is already wider than the pavement due to the tracks of the slipform paver.

In addition, the stringline becomes an obstacle for equipment, concrete delivery trucks, and finishing crews. If equipment access across the stringline is required, the stringline must be lowered and reset, resulting in delays and introducing the potential for errors.

Stringless paving is a technology that eliminates the installation and maintenance of stringlines and has the potential to decrease the need for surveying and increase the smoothness of the pavement profile. The benefits that can result from stringless paving include increased production, decreased construction time, and reduced potential for errors. (see Figure 1).

Several companies have developed stringless equipment control and guidance systems using technologies such as global position-

ing systems (GPS), robotic total stations, and laser positioning. Stringless technology replaces the traditional stringlines with an electronic tracking process that controls the horizontal and vertical operation of the slipform paver.

The construction industry has been using stringless technology for elevation and steering control of equipment for a number of years. To date, the extensive use of this technology has been applied to grading operations. However, stringless paving is an emerging technology for concrete paving because it has the potential to allow contractors and owner/agencies to receive production benefits (e.g., reduced survey costs, fewer construction hours) while still meeting smoothness requirements.

Although stringless paving has not been used extensively, several projects have been completed in the United States in the past few years. The techniques and equipment used vary according to each project, but the general concepts and methods are the same.

The stringless paving methods described on the following 2 pages are specific to a research project (TR-600) conducted in Iowa in 2009. The final page of this document contains additional information about stringless paving research projects in Iowa.



**Figure 1: Stringline (left) and stringless (right) pavers**



# STRINGLESS PAVING for Concrete Overlay Over Asphalt TR-600 Research Project

Developing stringless paving technology involves a three step process. The first step is collecting survey data of the existing surface (Figure 3) to develop and build a database. Step two is to design the roadway and create the proposed 3D computer model using the existing surface and proposed profile and cross sections. The third and final step (Figures 4 & 5) is to construct the proposed pavement by transferring the computer model to the paving machine, and utilizing a non-contact X,Y,Z guidance system.


**Roadway Surface Mapping.** In order to map the existing roadway surface, an all-terrain vehicle (ATV) was used, equipped with a laser profiler (Z coordinates) and GPS (X,Y coordinates) rover unit (Fig. 3). The utility vehicle was driven along the pavement at 5 mph, recording the existing pavement profile at 25-foot intervals along the pavement edges, wheel paths, lane quarter points, and centerline. It needs to be noted that GPS accuracy is good vertically to only one inch, so to obtain the proper accuracy in the Z coordinate, the ATV had to be augmented with a laser system. An alternate to the ATV is to survey the existing pavement with a total station. The data collected was used to produce a 3D plot of the pavement surface utilizing readily available CADD software. Data was streamed from both units to a central computer for storage using the Iowa real time network (RTN) system and its ability to correct for location and elevation.

The ground reference system should contain reference points with known X,Y,Z values, spaced approximately 250 feet apart and on alternating sides of the roadway. The Z value should be obtained through electronic three-wire leveling just in advance of the construction to verify the overlay design assumptions and assure that the final product will meet the designer and contractor requirements.




ATV with GPS and laser profiler

The data management method involved the use of a NMEA string that provided X,Y,Z coordinates of each point in latitude, longitude, and elevation. The data was then translated into state plane coordinates and elevation from sea level in feet by the ISU/GIS laboratory staff.

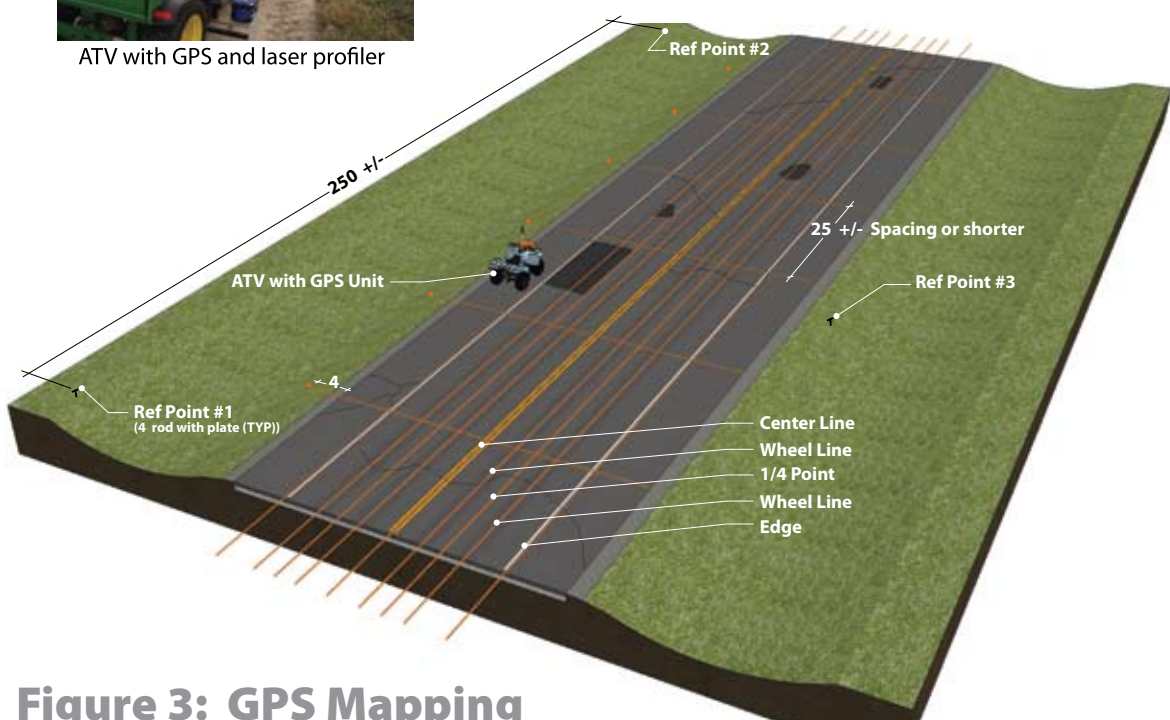

**Figure 3: GPS Mapping of Existing Surface Pavement (x,y,z)**


**Figure 4: Stringless Paving Operation**

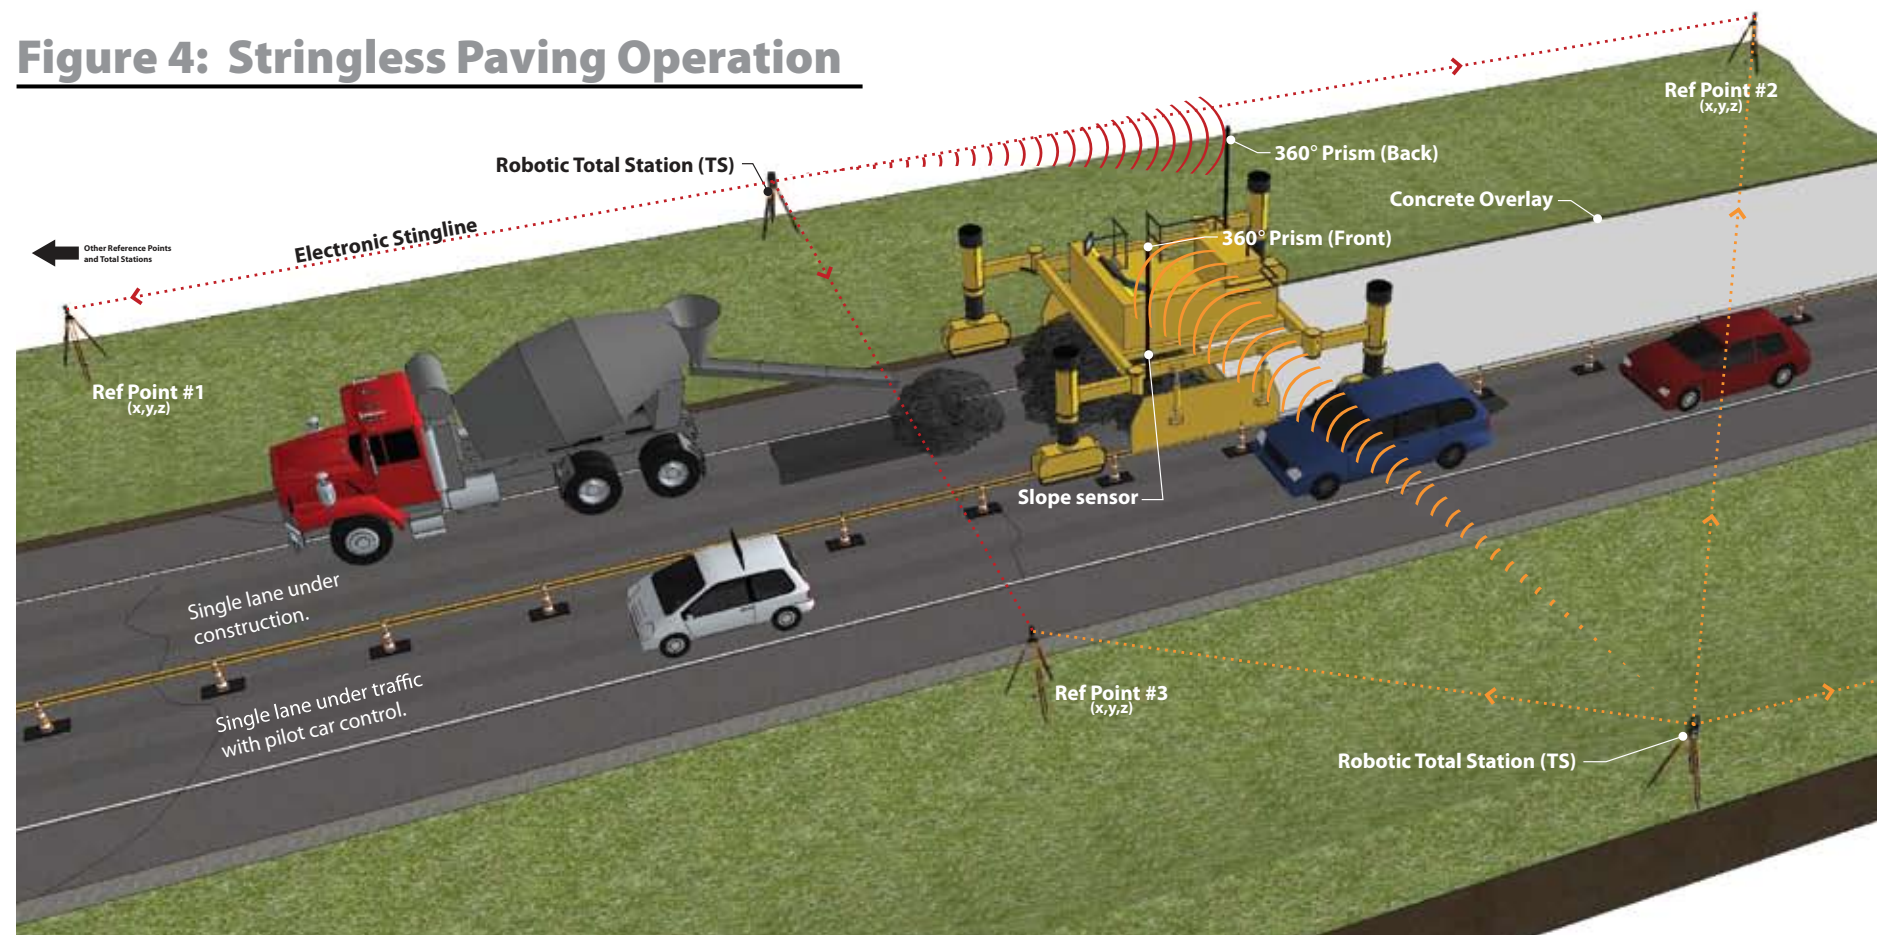

**Slipform Paver Machine Controls.** The 3D model provided the design surface of the proposed overlay. The stringless paving method selected, utilized multiple robotic total stations with prisms mounted on the paving machine. Vertical control reference points were established earlier at 250-foot intervals on alternating sides of the roadway. This kept the paving equipment, crews, and terrain from interfering with the line of sight between the paving machine and reference control points. In order for the robotic total station to establish correct X,Y,Z coordinates, the station needed to have a triangulation system which required a clear line-of-sight to at least three reference points. The clear line-of-sight is sometimes referred to as an electronic stingline. Modifications to the paving machines are required to add electronic/hydraulic controls.

During stringless paving operation, two total stations continually provide independent coordinate information to the paving machine. Prisms mounted on the paving machine reflect signals back to the total stations, giving them it's X, Y, Z position. This information is then transmitted via radio signal from the total stations to the computer on the paving machine. The paving machine computer processes it's exact position in relation to a computer model of the new pavement. The onboard computer then adjusts the elevation of the machine on each of the four corners of the pan to achieve the correct pavement thickness, crossfall, and mainfall.

**Figure 5: Paving Machine Control**

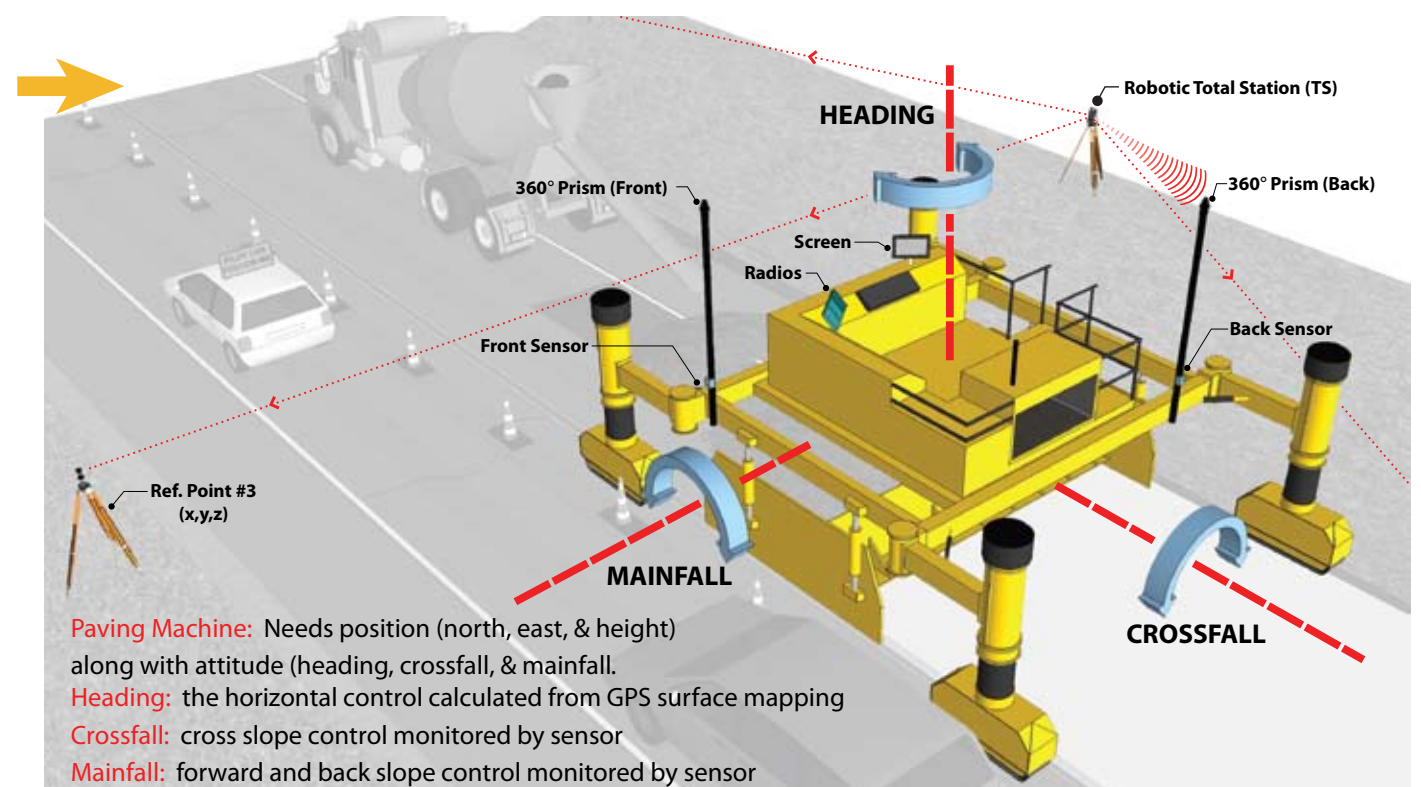

**Paving Machine:** Needs position (north, east, & height) along with attitude (heading, crossfall, & mainfall.

**Heading:** the horizontal control calculated from GPS surface mapping

**Crossfall:** cross slope control monitored by sensor

**Mainfall:** forward and back slope control monitored by sensor

